

ALL WEATHER CEMENT

USAGE:

All classes of PVC solvent weld pipe and fittings.

PIPE SIZE:

Pressure Pipe:

Up to 6" (15.24 cm)

Non-Pressure Pipe:

Up to 8" (20.32 cm)

PRESSURE RANGE USE:

Liquids:

Up to 300 PSI (2068 kPa)

TEMPERATURE RANGE

Use:

-20°F (-29°C) to 120°F (49°C)

CONSISTENCY/COLOR:

Medium Bodied

Blue Colored Cement

SET TIME:

20 seconds

COMPLETE CURE TIME:

24 Hours

SPECIFICATIONS:

Meets ASTM D2564

AVAILABLE SIZES:

Stock#	Size
WET4	¼ pint (118 ml)
WET8	½ pint (237 ml)
WET16	1 pint (473 ml)
WET32	1 quart (.95 L)
WET1	1 gal. (3.785 L)

J.C. Whitlam Manufacturing Co.

P.O. Box 380

Wadsworth, OH 44282

U.S. & Canada

Phone: 800-321-8358

FAX: 800-537-0588


International

Phone: 330-334-2524

FAX: 330-334-3005

12/2015

WHITLAM WEATHERPROOF LOW VOC* MEDIUM-BODIED PVC CEMENT

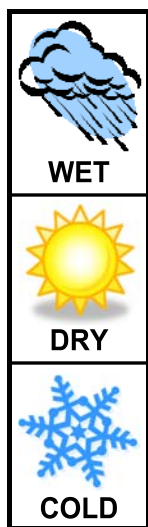

NSF Standard 14
NSF Standard 61

- **Fast Set, One Step Cement**
- **Suitable for All Weather Conditions**
- **No Primer Required****
- **Works Well on Wet or Dry Pipe**
- **Great for Flexible PVC Pipe**
- **Allows for Immediate Pressure Testing**

Distributed By:

 **WHITLAM**
PLUMB-PRO
The Industry Standard for Over 100 Years
www.joinpipe.com

*Maximum VOC emissions as applied and tested per SCAQMD Rule 1168, Test Method 316A: 250 g/l

**Use without primer when acceptable by local code.